

Wilo-VeroLine-IPL





Your advantages

- > High standard of corrosion protection thanks to cataphoretic coating
- > Standard condensate drainage holes in the motor housings and lanterns
- > Series design: motor with one-piece shaft
- > Version N: Standard motor V1 with stainless steel plug shaft
- > Bidirectional, force-flushed mechanical seal

Recommended services



Supervision



Commissioning





Maintenance

Eco-friendly features

- > Compact design of cast iron components for lowest possible weight
- > Sustainable and carbon-neutral production and processes in our European factories



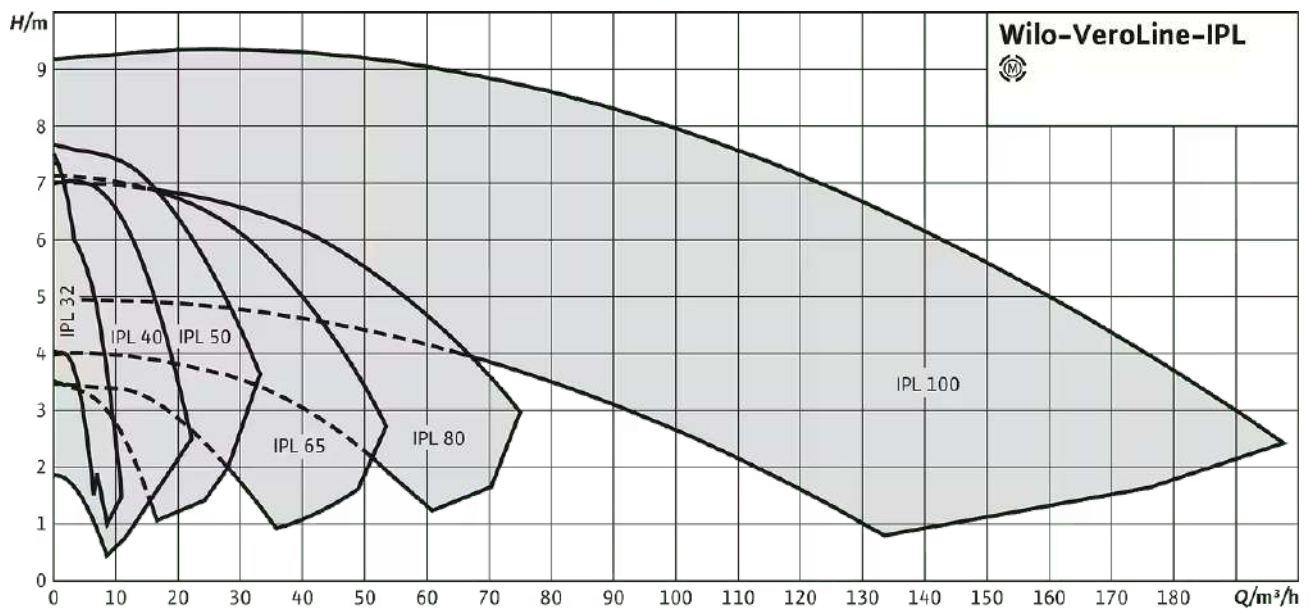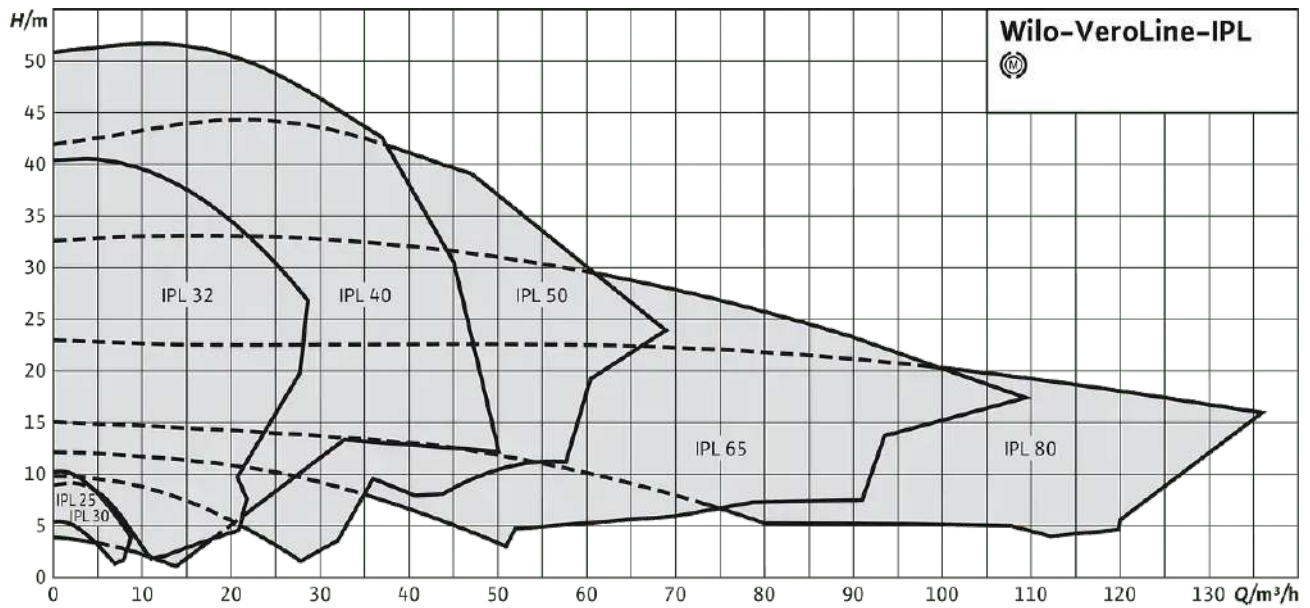

Design

Glanded pump in in-line design with screwed connection or flange connection

Application

Pumping of heating water (acc. to VDI 2035), chilled water and water/glycol mixtures without abrasive substances in heating, chilled water and cooling systems.

Typekey

Example	IPL 40/160-4/2
IPL	In-line pump
40	Nominal diameter DN of the pipe connection
160	Nominal impeller diameter
4	Rated motor power P2 in kW
2	Number of poles

Technical data

- Permissible temperature range -20 °C to +120 °C
- Mains connection 3~400 V, 50 Hz (others on request)
- Protection class IP 55
- Nominal diameter Rp 1 to DN 100
- Max. operating pressure 10 bar (special version: 16 bar)

Materials

- Pump housing and lantern: EN-GJL-250
- Impeller: PPO fibreglass-reinforced EN-GJL-200 (depending on pump type)
- Shaft: 1.4021
- Mechanical seal: AQEGG; other mechanical seals on request

Construction

Single-stage, low-pressure centrifugal pump in in-line design with

- Mechanical seal
- Flange connection with pressure measuring connection R 1/8
- Motor with one-piece shaft

Scope of delivery

- Pump
- Installation and operating instructions

Options

- ...-H4 variant with PN6/10 flanges (at additional charge)
- ...-H5 variant with PN16 housing (at additional charge)
- Other voltages and frequencies as well as ATEX approval on request

Accessories

- Mounting brackets for installation on a base
- PTC thermistor sensor, PTC resistor tripping relay
- Special motors
- Special mechanical seals
- SC-HVAC, CC-HVAC control systems and switchgears

Product list

Product description	Number of poles	MEI	IE	Nominal flange diameter	Mechanical seal	Port-to-port length L_0	Rated power P_2	Gross weight, approx. m	Article number	GRD group	Blind flange
VeroLine-IPL 25/70-0,12/2	2	-	IE2	G 1½	AQ1EGG	180 mm	0.12 kW	10 kg	2089569	10	-
VeroLine-IPL 25/70-0,12/2-S1	2	-	IE2	G 1½	Q1Q1X4GG	180 mm	0.12 kW	10 kg	2105565	10	-
VeroLine-IPL 25/80-0,12/2	2	-	IE2	G 1½	AQ1EGG	180 mm	0.12 kW	10 kg	2089570	10	-
VeroLine-IPL 25/80-0,12/2-S1	2	-	IE2	G 1½	Q1Q1X4GG	180 mm	0.12 kW	10 kg	2086452	10	-
VeroLine-IPL 25/85-0,18/2	2	-	IE2	G 1½	AQ1EGG	180 mm	0.18 kW	11 kg	2089571	10	-
VeroLine-IPL 25/85-0,18/2-S1	2	-	IE2	G 1½	Q1Q1X4GG	180 mm	0.18 kW	11 kg	2107015	10	-
VeroLine-IPL 25/90-0,25/2	2	-	IE2	G 1½	AQ1EGG	180 mm	0.25 kW	11 kg	2089572	10	-
VeroLine-IPL 25/90-0,25/2-S1	2	-	IE2	G 1½	Q1Q1X4GG	180 mm	0.25 kW	11 kg	2097024	10	-
VeroLine-IPL 30/70-0,12/2	2	-	IE2	G 2	AQ1EGG	180 mm	0.12 kW	10 kg	2089573	10	-
VeroLine-IPL 30/70-0,12/2-S1	2	-	IE2	G 2	Q1Q1X4GG	180 mm	0.12 kW	10 kg	2163041	10	-
VeroLine-IPL 30/80-0,12/2	2	-	IE2	G 2	AQ1EGG	180 mm	0.12 kW	10 kg	2089574	10	-
VeroLine-IPL 30/80-0,12/2-S1	2	-	IE2	G 2	Q1Q1X4GG	180 mm	0.12 kW	10 kg	2117099	10	-
VeroLine-IPL 30/85-0,18/2	2	-	IE2	G 2	AQ1EGG	180 mm	0.18 kW	11 kg	2089575	10	-
VeroLine-IPL 30/85-0,18/2-S1	2	-	IE2	G 2	Q1Q1X4GG	180 mm	0.18 kW	11 kg	2087573	10	-
VeroLine-IPL 30/90-0,25/2	2	-	IE2	G 2	AQ1EGG	180 mm	0.25 kW	11 kg	2089576	10	-
VeroLine-IPL 30/90-0,25/2-S1	2	-	IE2	G 2	Q1Q1X4GG	180 mm	0.25 kW	11 kg	2097139	10	-
VeroLine-IPL 32/85-0,37/2	2	≥0.4	IE2	DN 32	AQ1EGG	260 mm	0.37 kW	23 kg	2150335	3	-
VeroLine-IPL 32/85-0,37/2-S1	2	≥0.4	IE2	DN 32	Q1Q1X4GG	260 mm	0.37 kW	23 kg	2154981	3	-
VeroLine-IPL 32/95-0,55/2	2	≥0.4	IE2	DN 32	AQ1EGG	260 mm	0.55 kW	26 kg	2150336	3	-
VeroLine-IPL 32/95-0,55/2-S1	2	≥0.4	IE2	DN 32	Q1Q1X4GG	260 mm	0.55 kW	26 kg	2154982	3	-
VeroLine-IPL 32/105-0,12/4	4	≥0.4	IE2	DN 32	AQ1EGG	260 mm	0.12 kW	23 kg	2150342	3	-
VeroLine-IPL 32/105-0,12/4-S1	4	≥0.4	IE2	DN 32	Q1Q1X4GG	260 mm	0.12 kW	23 kg	2154989	3	-
VeroLine-IPL 32/105-0,75/2	2	≥0.4	IE3	DN 32	AQ1EGG	260 mm	0.75 kW	25 kg	2152928	3	-
VeroLine-IPL 32/105-0,75/2-S1	2	≥0.4	IE3	DN 32	Q1Q1X4GG	260 mm	0.75 kW	25 kg	2164231	3	-
VeroLine-IPL 32/125-1,1/2	2	≥0.4	IE3	DN 32	AQ1EGG	260 mm	1.1 kW	29 kg	2152929	3	-
VeroLine-IPL 32/125-1,1/2-S1	2	≥0.4	IE3	DN 32	Q1Q1X4GG	260 mm	1.1 kW	29 kg	2171142	3	-

Product description	Number of poles	MEI	IE	Nominal flange diameter	Mechanical seal	Port-to-port length L_0	Rated power P_2	Gross weight, approx. m	Article number	GRD group	Blind flange
VeroLine-IPL 32/135-0,25/4	4	≥0.4	IE2	DN 32	AQ1EGG	260 mm	0.25 kW	24 kg	2150343	3	-
VeroLine-IPL 32/135-0,25/4-S1	4	≥0.4	IE2	DN 32	Q1Q1X4GG	260 mm	0.25 kW	24 kg	2154990	3	-
VeroLine-IPL 32/135-1,1/2	2	≥0.4	IE3	DN 32	AQ1EGG	260 mm	1.1 kW	29 kg	2152930	3	-
VeroLine-IPL 32/135-1,1/2-S1	2	≥0.4	IE3	DN 32	Q1Q1X4GG	260 mm	1.1 kW	29 kg	2171143	3	-
VeroLine-IPL 32/135-1,5/2	2	≥0.4	IE3	DN 32	AQ1EGG	260 mm	1.5 kW	34 kg	2152931	3	-
VeroLine-IPL 32/135-1,5/2-S1	2	≥0.4	IE3	DN 32	Q1Q1X4GG	260 mm	1.5 kW	34 kg	2166983	3	-
VeroLine-IPL 32/155-3/2	2	≥0.4	IE3	DN 32	AQ1EGG	320 mm	3 kW	55 kg	2231804	12	-
VeroLine-IPL 32/155-3/2-S1	2	≥0.4	IE3	DN 32	Q1Q1X4GG	320 mm	3 kW	55 kg	2231805	12	-
VeroLine-IPL 32/165-4/2	2	≥0.4	IE3	DN 32	AQ1EGG	320 mm	4 kW	62 kg	2231806	12	-
VeroLine-IPL 32/165-4/2-S1	2	≥0.4	IE3	DN 32	Q1Q1X4GG	320 mm	4 kW	62 kg	2231807	12	-
VeroLine-IPL 40/75-0,12/2	2	≥0.4	IE2	DN 40	AQ1EGG	250 mm	0.12 kW	23 kg	2155494	3	-
VeroLine-IPL 40/75-0,12/2-S1	2	≥0.4	IE2	DN 40	Q1Q1X4GG	250 mm	0.12 kW	23 kg	2161322	3	-
VeroLine-IPL 40/80-0,09/4	4	-	IE2	DN 40	AQ1EGG	250 mm	0.09 kW	19 kg	2089695	3	-
VeroLine-IPL 40/90-0,37/2	2	≥0.4	IE2	DN 40	AQ1EGG	250 mm	0.37 kW	24 kg	2089584	3	-
VeroLine-IPL 40/90-0,37/2-S1	2	≥0.4	IE2	DN 40	Q1Q1X4GG	250 mm	0.37 kW	24 kg	2068872	3	-
VeroLine-IPL 40/110-0,12/4	4	≥0.4	IE2	DN 40	AQ1EGG	250 mm	0.12 kW	23 kg	2089553	3	-
VeroLine-IPL 40/110-0,12/4-S1	4	≥0.4	IE2	DN 40	Q1Q1X4GG	250 mm	0.12 kW	23 kg	2105902	3	-
VeroLine-IPL 40/115-0,55/2	2	≥0.4	IE2	DN 40	AQ1EGG	250 mm	0.55 kW	25 kg	2089585	3	-
VeroLine-IPL 40/115-0,55/2-S1	2	≥0.4	IE2	DN 40	Q1Q1X4GG	250 mm	0.55 kW	25 kg	2070856	3	-
VeroLine-IPL 40/120-1,5/2	2	≥0.4	IE3	DN 40	AQ1EGG	320 mm	1.5 kW	36 kg	2121201	3	-
VeroLine-IPL 40/120-1,5/2-S1	2	≥0.4	IE3	DN 40	Q1Q1X4GG	320 mm	1.5 kW	36 kg	2155447	3	-
VeroLine-IPL 40/130-0,25/4	4	≥0.4	IE2	DN 40	AQ1EGG	320 mm	0.25 kW	27 kg	2089554	3	-
VeroLine-IPL 40/130-0,25/4-S1	4	≥0.4	IE2	DN 40	Q1Q1X4GG	320 mm	0.25 kW	27 kg	2082873	3	-
VeroLine-IPL 40/130-2,2/2	2	≥0.4	IE3	DN 40	AQ1EGG	320 mm	2.2 kW	37 kg	2121202	3	-
VeroLine-IPL 40/130-2,2/2-S1	2	≥0.4	IE3	DN 40	Q1Q1X4GG	320 mm	2.2 kW	37 kg	2171146	3	-
VeroLine-IPL 40/150-3/2	2	≥0.4	IE3	DN 40	AQ1EGG	320 mm	3 kW	43 kg	2121203	3	-
VeroLine-IPL 40/150-3/2-S1	2	≥0.4	IE3	DN 40	Q1Q1X4GG	320 mm	3 kW	43 kg	2166988	3	-
VeroLine-IPL 40/155-4/2	2	≥0.4	IE3	DN 40	AQ1EGG	340 mm	4 kW	63 kg	2231808	12	-

Product description	Number of poles	MEI	IE	Nominal flange diameter	Mechanical seal	Port-to-port length L_0	Rated power P_2	Gross weight, approx. m	Article number	GRD group	Blind flange
VeroLine-IPL 40/155-4/2-S1	2	≥0.4	IE3	DN 40	Q1Q1X4GG	340 mm	4 kW	63 kg	2231809	12	-
VeroLine-IPL 40/160-0,37/4	4	≥0.4	IE2	DN 40	AQ1EGG	320 mm	0.37 kW	28 kg	2089555	3	-
VeroLine-IPL 40/160-0,37/4-S1	4	≥0.4	IE2	DN 40	Q1Q1X4GG	320 mm	0.37 kW	28 kg	2068674	3	-
VeroLine-IPL 40/160-4/2	2	≥0.4	IE3	DN 40	AQ1EGG	320 mm	4 kW	51 kg	2121204	3	-
VeroLine-IPL 40/160-4/2-S1	2	≥0.4	IE3	DN 40	Q1Q1X4GG	320 mm	4 kW	51 kg	2163259	3	-
VeroLine-IPL 40/165-5,5/2	2	≥0.4	IE3	DN 40	AQ1EGG	340 mm	5.5 kW	72 kg	2231810	12	-
VeroLine-IPL 40/165-5,5/2-S1	2	≥0.4	IE3	DN 40	Q1Q1X4GG	340 mm	5.5 kW	72 kg	2231811	12	-
VeroLine-IPL 40/205-7,5/2	2	≥0.4	IE3	DN 40	AQ1EGG	390 mm	7.5 kW	102 kg	2231812	12	-
VeroLine-IPL 40/205-7,5/2-S1	2	≥0.4	IE3	DN 40	Q1Q1X4GG	390 mm	7.5 kW	102 kg	2231813	12	-
VeroLine-IPL 50/95-0,55/2	2	≥0.4	IE2	DN 50	AQ1EGG	280 mm	0.55 kW	25 kg	2152442	3	-
VeroLine-IPL 50/95-0,55/2-S1	2	≥0.4	IE2	DN 50	Q1Q1X4GG	280 mm	0.55 kW	25 kg	2154987	3	-
VeroLine-IPL 50/105-0,12/4	4	≥0.4	IE2	DN 50	AQ1EGG	280 mm	0.12 kW	24 kg	2150344	3	-
VeroLine-IPL 50/105-0,12/4-S1	4	≥0.4	IE2	DN 50	Q1Q1X4GG	280 mm	0.12 kW	24 kg	2154991	3	-
VeroLine-IPL 50/105-0,75/2	2	≥0.4	IE3	DN 50	AQ1EGG	280 mm	0.75 kW	27 kg	2152934	3	-
VeroLine-IPL 50/105-0,75/2-S1	2	≥0.4	IE3	DN 50	Q1Q1X4GG	280 mm	0.75 kW	27 kg	2164232	3	-
VeroLine-IPL 50/115-4/2	2	≥0.4	IE3	DN 50	AQ1EGG	340 mm	4 kW	64 kg	2231814	12	-
VeroLine-IPL 50/115-4/2-S1	2	≥0.4	IE3	DN 50	Q1Q1X4GG	340 mm	4 kW	64 kg	2231815	12	-
VeroLine-IPL 50/120-0,25/4	4	≥0.4	IE2	DN 50	AQ1EGG	340 mm	0.25 kW	30 kg	2112395	3	-
VeroLine-IPL 50/120-0,25/4-S1	4	≥0.4	IE2	DN 50	Q1Q1X4GG	340 mm	0.25 kW	30 kg	2149508	3	-
VeroLine-IPL 50/120-1,5/2	2	≥0.4	IE3	DN 50	AQ1EGG	340 mm	1.5 kW	39 kg	2121209	3	-
VeroLine-IPL 50/120-1,5/2-S1	2	≥0.4	IE3	DN 50	Q1Q1X4GG	340 mm	1.5 kW	39 kg	2166989	3	-
VeroLine-IPL 50/130-0,37/4	4	≥0.4	IE2	DN 50	AQ1EGG	340 mm	0.37 kW	31 kg	2089557	3	-
VeroLine-IPL 50/130-0,37/4-S1	4	≥0.4	IE2	DN 50	Q1Q1X4GG	340 mm	0.37 kW	31 kg	2057299	3	-
VeroLine-IPL 50/130-2,2/2	2	≥0.4	IE3	DN 50	AQ1EGG	340 mm	2.2 kW	40 kg	2121210	3	-
VeroLine-IPL 50/130-2,2/2-S1	2	≥0.4	IE3	DN 50	Q1Q1X4GG	340 mm	2.2 kW	40 kg	2166995	3	-
VeroLine-IPL 50/140-3/2	2	≥0.4	IE3	DN 50	AQ1EGG	340 mm	3 kW	48 kg	2121211	3	-
VeroLine-IPL 50/140-3/2-S1	2	≥0.4	IE3	DN 50	Q1Q1X4GG	340 mm	3 kW	46 kg	2166987	3	-
VeroLine-IPL 50/145-5,5/2	2	≥0.4	IE3	DN 50	AQ1EGG	340 mm	5.5 kW	75 kg	2231816	12	-

Product description	Number of poles	MEI	IE	Nominal flange diameter	Mechanical seal	Port-to-port length L_0	Rated power P_2	Gross weight, approx. m	Article number	GRD group	Blind flange
VeroLine-IPL 50/145-5,5/2-S1	2	≥0.4	IE3	DN 50	Q1Q1X4GG	340 mm	5.5 kW	75 kg	2231817	12	-
VeroLine-IPL 50/150-4/2	2	≥0.4	IE3	DN 50	AQ1EGG	340 mm	4 kW	54 kg	2121212	3	-
VeroLine-IPL 50/150-4/2-S1	2	≥0.4	IE3	DN 50	Q1Q1X4GG	340 mm	4 kW	54 kg	2164225	3	-
VeroLine-IPL 50/155-7,5/2	2	≥0.4	IE3	DN 50	AQ1EGG	340 mm	7.5 kW	97 kg	2231818	12	-
VeroLine-IPL 50/155-7,5/2-S1	2	≥0.4	IE3	DN 50	Q1Q1X4GG	340 mm	7.5 kW	97 kg	2231819	12	-
VeroLine-IPL 50/160-0,55/4	4	≥0.4	IE2	DN 50	AQ1EGG	340 mm	0.55 kW	33 kg	2089558	3	-
VeroLine-IPL 50/160-0,55/4-S1	4	≥0.4	IE2	DN 50	Q1Q1X4GG	340 mm	0.55 kW	33 kg	2072144	3	-
VeroLine-IPL 50/165-7,5/2	2	≥0.4	IE3	DN 50	AQ1EGG	440 mm	7.5 kW	106 kg	2231820	12	-
VeroLine-IPL 50/165-7,5/2-S1	2	≥0.4	IE3	DN 50	Q1Q1X4GG	440 mm	7.5 kW	106 kg	2231821	12	-
VeroLine-IPL 65/110-0,25/4	4	≥0.4	IE2	DN 65	AQ1EGG	340 mm	0.25 kW	32 kg	2129203	3	F
VeroLine-IPL 65/110-0,25/4-S1	4	≥0.4	IE2	DN 65	Q1Q1X4GG	340 mm	0.25 kW	32 kg	2146573	3	F
VeroLine-IPL 65/110-2,2/2	2	≥0.4	IE3	DN 65	AQ1EGG	340 mm	2.2 kW	42 kg	2121219	3	-
VeroLine-IPL 65/110-2,2/2-S1	2	≥0.4	IE3	DN 65	Q1Q1X4GG	340 mm	2.2 kW	42 kg	2164252	3	-
VeroLine-IPL 65/115-1,5/2	2	≥0.4	IE3	DN 65	AQ1EGG	340 mm	1.5 kW	40 kg	2121218	3	-
VeroLine-IPL 65/115-1,5/2-S1	2	≥0.4	IE3	DN 65	Q1Q1X4GG	340 mm	1.5 kW	40 kg	2165991	3	-
VeroLine-IPL 65/115-5,5/2	2	≥0.4	IE3	DN 65	AQ1EGG	340 mm	5.5 kW	74 kg	2231822	12	-
VeroLine-IPL 65/115-5,5/2-S1	2	≥0.4	IE3	DN 65	Q1Q1X4GG	340 mm	5.5 kW	74 kg	2231823	12	-
VeroLine-IPL 65/120-0,37/4	4	≥0.4	IE2	DN 65	AQ1EGG	340 mm	0.37 kW	33 kg	2129204	3	-
VeroLine-IPL 65/120-0,37/4-S1	4	≥0.4	IE2	DN 65	Q1Q1X4GG	340 mm	0.37 kW	33 kg	2146204	3	-
VeroLine-IPL 65/120-3/2	2	≥0.4	IE3	DN 65	AQ1EGG	340 mm	3 kW	50 kg	2121220	3	-
VeroLine-IPL 65/120-3/2-S1	2	≥0.4	IE3	DN 65	Q1Q1X4GG	340 mm	3 kW	50 kg	2166985	3	-
VeroLine-IPL 65/125-7,5/2	2	≥0.4	IE3	DN 65	AQ1EGG	340 mm	7.5 kW	95 kg	2231824	12	-
VeroLine-IPL 65/125-7,5/2-S1	2	≥0.4	IE3	DN 65	Q1Q1X4GG	340 mm	7.5 kW	95 kg	2231825	12	-
VeroLine-IPL 65/130-0,55/4	4	≥0.4	IE2	DN 65	AQ1EGG	340 mm	0.55 kW	35 kg	2129205	3	-
VeroLine-IPL 65/130-0,55/4-S1	4	≥0.4	IE2	DN 65	Q1Q1X4GG	340 mm	0.55 kW	35 kg	2147618	3	-
VeroLine-IPL 65/130-4/2	2	≥0.4	IE3	DN 65	AQ1EGG	340 mm	4 kW	57 kg	2121221	3	-
VeroLine-IPL 65/130-4/2-S1	2	≥0.4	IE3	DN 65	Q1Q1X4GG	340 mm	4 kW	57 kg	2155245	3	-
VeroLine-IPL 65/135-5,5/2	2	≥0.4	IE3	DN 65	AQ1EGG	430 mm	5.5 kW	97 kg	2231826	12	-

Product description	Number of poles	MEI	IE	Nominal flange diameter	Mechanical seal	Port-to-port length L_0	Rated power P_2	Gross weight, approx. m	Article number	GRD group	Blind flange
VeroLine-IPL 65/135-5,5/2-S1	2	≥0.4	IE3	DN 65	Q1Q1X4GG	430 mm	5.5 kW	97 kg	2231827	12	-
VeroLine-IPL 65/145-7,5/2	2	≥0.4	IE3	DN 65	AQ1EGG	430 mm	7.5 kW	104 kg	2231828	12	-
VeroLine-IPL 65/145-7,5/2-S1	2	≥0.4	IE3	DN 65	Q1Q1X4GG	430 mm	7.5 kW	104 kg	2231829	12	-
VeroLine-IPL 80/105-3/2	2	≥0.4	IE3	DN 80	AQ1EGG	360 mm	3 kW	56 kg	2121229	3	-
VeroLine-IPL 80/105-3/2-S1	2	≥0.4	IE3	DN 80	Q1Q1X4GG	360 mm	3 kW	56 kg	2164230	3	-
VeroLine-IPL 80/110-4/2	2	≥0.4	IE3	DN 80	AQ1EGG	360 mm	4 kW	62 kg	2121189	3	-
VeroLine-IPL 80/110-4/2-S1	2	≥0.4	IE3	DN 80	Q1Q1X4GG	360 mm	4 kW	62 kg	2164228	3	-
VeroLine-IPL 80/115-2,2/2	2	≥0.4	IE3	DN 80	AQ1EGG	360 mm	2.2 kW	47 kg	2121228	3	-
VeroLine-IPL 80/115-2,2/2-S1	2	≥0.4	IE3	DN 80	Q1Q1X4GG	360 mm	2.2 kW	47 kg	2171153	3	-
VeroLine-IPL 80/120-0,55/4	4	≥0.4	IE2	DN 80	AQ1EGG	360 mm	0.55 kW	40 kg	2129206	3	-
VeroLine-IPL 80/120-0,55/4-S1	4	≥0.4	IE2	DN 80	Q1Q1X4GG	360 mm	0.55 kW	40 kg	2163222	3	-
VeroLine-IPL 80/120-4/2	2	≥0.4	IE3	DN 80	AQ1EGG	360 mm	4 kW	62 kg	2121230	3	-
VeroLine-IPL 80/120-4/2-S1	2	≥0.4	IE3	DN 80	Q1Q1X4GG	360 mm	4 kW	62 kg	2171154	3	-
VeroLine-IPL 80/125-0,75/4	4	≥0.4	IE3	DN 80	AQ1EGG	360 mm	0.75 kW	45 kg	2121190	3	-
VeroLine-IPL 80/125-0,75/4-S1	4	≥0.4	IE3	DN 80	Q1Q1X4GG	360 mm	0.75 kW	45 kg	2171138	3	-
VeroLine-IPL 80/135-5,5/2	2	≥0.4	IE3	DN 80	AQ1EGG	400 mm	5.5 kW	93 kg	2231830	12	-
VeroLine-IPL 80/135-5,5/2-S1	2	≥0.4	IE3	DN 80	Q1Q1X4GG	400 mm	5.5 kW	93 kg	2231831	12	-
VeroLine-IPL 80/140-1,1/4	4	≥0.4	IE3	DN 80	AQ1EGG	360 mm	1.1 kW	48 kg	2121191	3	-
VeroLine-IPL 80/140-1,1/4-S1	4	≥0.4	IE3	DN 80	Q1Q1X4GG	360 mm	1.1 kW	48 kg	2166981	3	-
VeroLine-IPL 80/145-7,5/2	2	≥0.4	IE3	DN 80	AQ1EGG	400 mm	7.5 kW	101 kg	2231832	12	-
VeroLine-IPL 80/145-7,5/2-S1	2	≥0.4	IE3	DN 80	Q1Q1X4GG	400 mm	7.5 kW	101 kg	2231833	12	-
VeroLine-IPL 100/125-1,1/4	4	≥0.4	IE3	DN 100	AQ1EGG	500 mm	1.1 kW	95 kg	2231834	12	-
VeroLine-IPL 100/125-1,1/4-S1	4	≥0.4	IE3	DN 100	Q1Q1X4GG	500 mm	1.1 kW	95 kg	2231835	12	-
VeroLine-IPL 100/135-1,5/4	4	≥0.4	IE3	DN 100	AQ1EGG	500 mm	1.5 kW	96 kg	2231836	12	-
VeroLine-IPL 100/135-1,5/4-S1	4	≥0.4	IE3	DN 100	Q1Q1X4GG	500 mm	1.5 kW	96 kg	2231837	12	-
VeroLine-IPL 100/145-2,2/4	4	≥0.4	IE3	DN 100	AQ1EGG	500 mm	2.2 kW	114 kg	2231838	12	-
VeroLine-IPL 100/145-2,2/4-S1	4	≥0.4	IE3	DN 100	Q1Q1X4GG	500 mm	2.2 kW	114 kg	2231839	12	-
VeroLine-IPL 100/155-3/4	4	≥0.4	IE3	DN 100	AQ1EGG	500 mm	3 kW	117 kg	2231840	12	-

Product description	Number of poles	MEI	IE	Nominal flange diameter	Mechanical seal	Port-to-port length <i>L0</i>	Rated power <i>P</i> ₂	Gross weight, approx. <i>m</i>	Article number	GRD group	Blind flange
VeroLine-IPL 100/155-3/4-S1	4	≥0.4	IE3	DN 100	Q1Q1X4GG	500 mm	3 kW	117 kg	2231841	12	-

WILO SE
Wilopark 1
44263 Dortmund
Germany
T +49 231 4102-0
F +49 231 4102-7363
wilo@wilo.com
www.wilo.com